Modern Stochastics: Theory and Applications 12 (3) (2025) 313–324
https://doi.org/10.15559/25-VMSTA274

About stability of equilibria of one system of stochastic delay differential equations with exponential nonlinearity

Leonid Shaikhet

Department of Mathematics, Ariel University, Ariel 40700, Israel

leonid.shaikhet@usa.net (L. Shaikhet)

Received: 12 October 2024, Revised: 1 February 2025, Accepted: 1 February 2025,
Published online: 13 February 2025

Abstract A system of two nonlinear delay differential equations under stochastic perturbations is considered. Nonlinearity of the exponential type in each equation of the system under consideration depends on the both variables of the system. The stability in probability of the zero and nonzero equilibria of the system is studied via the general method of Lyapunov functionals construction and the method of linear matrix inequalities (LMIs). The obtained results are illustrated via examples and figures with numerical simulations of solutions of a considered system of stochastic differential equations. The proposed way of investigation can be applied to nonlinear systems of higher dimension and with other types of nonlinearity, both for delay differential equations and for difference equations.

Keywords Nonlinear differential equation, stochastic perturbations, asymptotic mean square stability, stability in probability, linear matrix inequality (LMI), exponential nonlinearity
2010 MSC 34G20, 34K20, 34K50

1 Introduction

Systems of differential and difference equations with various types of exponential nonlinearities are very popular both in theoretical research and in different applications (see, for instance, [2, 4, 5, 7–9, 15, 18–22, 24, 26–29, 33–41] and references therein).

© 2025 The Author(s). Published by VTeX. Open access article under the CC BY license.

Here, similarly to [38], the stability of the positive equilibrium of a system with exponential nonlinearity is investigated under stochastic perturbations via the general method of Lyapunov functionals construction [16, 17, 31, 32] and the method of linear matrix inequalities (LMIs) [3, 6, 10–12, 14, 23, 25, 30]. However, unlike, for instance, [28, 37–39], where the exponential nonlinearity in each equation depends on only one variable, here each equation exponentially depends on all variables of the system under consideration. The obtained results are illustrated via examples and figures with numerical simulations of solutions of the considered system of stochastic differential equations. Numerical analysis of the considered LMI is carried out using MATLAB.

Consider the system of two nonlinear delay differential equations

$$\begin{aligned} &\dot{x}_1(t) + a_1x_1(t) + b_1x_1(t-h) = c_1x_1(t)e^{-p_1x_1(t)-q_1x_2(t)},\\ &\dot{x}_2(t) + a_2x_2(t) + b_2x_2(t-h) = c_2x_2(t)e^{-p_2x_1(t)-q_2x_2(t)},\\ &x_i(s) = \phi_i(s), \quad s \in [-h,0], \quad i = 1,2, \quad t \geq 0, \end{aligned} \tag{1.1}$$

with positive parameters and positive initial conditions.

It is clear that the system (1.1) has the zero equilibrium $E_0 = (0,0)$, and the nonzero equilibrium $E^* = (x_1^*, x_2^*)$ of the system (1.1) is defined by the system of two algebraic equations

$$\begin{aligned} a_1 + b_1 &= c_1e^{-p_1x_1-q_1x_2},\\ a_2 + b_2 &= c_2e^{-p_2x_1-q_2x_2}, \end{aligned} \tag{1.2}$$

that can be presented in the form of the system of two linear equations

$$\begin{aligned} p_1x_1 + q_1x_2 &= r_1,\\ p_2x_1 + q_2x_2 &= r_2,\\ r_i &= \ln\bigl(c_i/(a_i+b_i)\bigr), \quad i = 1,2, \end{aligned} \tag{1.3}$$

with the solution

$$x_i^* = \frac{\Delta_i}{\Delta}, \quad i = 1,2, \quad \Delta = \begin{vmatrix} p_1 & q_1 \\ p_2 & q_2 \end{vmatrix}, \quad \Delta_1 = \begin{vmatrix} r_1 & q_1 \\ r_2 & q_2 \end{vmatrix}, \quad \Delta_2 = \begin{vmatrix} p_1 & r_1 \\ p_2 & r_2 \end{vmatrix}. \tag{1.4}$$

Note that via (1.3) for an equilibrium $E^* = (x_1^*, x_2^*)$ with both positive coordinates the condition $r_i > 0$, i.e. $c_i > a_i + b_i$, $i = 1,2$, must be satisfied. It is clear that for $c_i < a_i + b_i$ we get a negative equilibrium, while for $c_i = a_i + b_i$ there is the zero equilibrium. However, the inequality $c_i > a_i + b_i$ is only a necessary condition for the solution of the system (1.3) to be positive, but not a sufficient one. Indeed, for example, the system $2x_1 + x_2 = 4$, $x_1 + x_2 = 1$ with $r_1 = 4$, $r_2 = 1$ has the solution $x_1 = 3$, $x_2 = -2$, the system $2x_1 + x_2 = 4$, $x_1 + x_2 = 2$ with $r_1 = 4$, $r_2 = 2$ has the solution $x_1 = 2$, $x_2 = 0$.

Below, the system (1.1) is investigated under stochastic perturbations, the conditions of stability for both the zero and one positive equilibria are studied, the obtained results are illustrated by numerical simulations of solutions of the system under consideration.

2 Stochastic perturbations, centralization and linearization

Let (x_1^*, x_2^*) be one of the equilibria of the system (1.1). Let us suppose that the system (1.1) is exposed to stochastic perturbations of the white noise type, that are directly proportional to the deviation of the system (1.1) state $(x_1(t), x_2(t))$ from the equilibrium (x_1^*, x_2^*). As a result, we obtain the system of Ito's stochastic delay differential equations [13]

$$\begin{aligned} dx_1(t) &= \big(-a_1x_1(t) - b_1x_1(t-h) + c_1x_1(t)e^{-p_1x_1(t)-q_1x_2(t)}\big)dt \\ &\quad + \sigma_1\big(x_1(t) - x_1^*\big)dw_1(t), \\ dx_2(t) &= \big(-a_2x_2(t) - b_2x_2(t-h) + c_2x_2(t)e^{-p_2x_1(t)-q_2x_2(t)}\big)dt \\ &\quad + \sigma_2\big(x_2(t) - x_2^*\big)dw_2(t). \end{aligned} \tag{2.1}$$

Note that stochastic perturbations of the type of (2.1) were first used in [1] and later in many other works (see, for instance, [31, 32] and references therein). In this case, the equilibrium (x_1^*, x_2^*) of the deterministic system (1.1) is also the solution of the stochastic system (2.1).

2.1 Nonzero equilibrium

Let (x_1^*, x_2^*) be the nonzero equilibrium of the system (1.1). Using the new variables $y_i(t) = x_i(t) - x_i^*$, $i = 1, 2$, and (1.2), transform the first equation of the system (2.1) by the following way:

$$\begin{aligned} dy_1(t) &= \big[-a_1\big(y_1(t) + x_1^*\big) - b_1\big(y_1(t-h) + x_1^*\big) \\ &\quad + c_1\big(y_1(t) + x_1^*\big)e^{-p_1y_1(t)-q_1y_2(t)}e^{-p_1x_1^*-q_1x_2^*}\big]dt + \sigma_1y_1(t)dw_1(t) \\ &= \big[-a_1\big(y_1(t) + x_1^*\big) - b_1\big(y_1(t-h) + x_1^*\big) \\ &\quad + (a_1 + b_1)\big(y_1(t) + x_1^*\big)e^{-p_1y_1(t)-q_1y_2(t)}\big]dt + \sigma_1y_1(t)dw_1(t) \\ &= \big[\big(y_1(t) + x_1^*\big)\big((a_1 + b_1)e^{-p_1y_1(t)-q_1y_2(t)} - a_1\big) \\ &\quad - b_1\big(y_1(t-h) + x_1^*\big)\big]dt + \sigma_1y_1(t)dw_1(t). \end{aligned}$$

Similarly, for the second equation of the system (2.1) we have

$$\begin{aligned} dy_2(t) &= \big[-a_2\big(y_2(t) + x_2^*\big) - b_2\big(y_2(t-h) + x_2^*\big) \\ &\quad + c_2\big(y_2(t) + x_2^*\big)e^{-p_2y_1(t)-q_2y_2(t)}e^{-p_2x_1^*-q_2x_2^*}\big]dt + \sigma_2y_2(t)dw_2(t) \\ &= \big[-a_2\big(y_2(t) + x_2^*\big) - b_2\big(y_2(t-h) + x_2^*\big) \\ &\quad + (a_2 + b_2)\big(y_2(t) + x_2^*\big)e^{-p_2y_1(t)-q_2y_2(t)}\big]dt + \sigma_2y_2(t)dw_2(t) \\ &= \big[\big(y_2(t) + x_2^*\big)\big((a_2 + b_2)e^{-p_2y_1(t)-q_2y_2(t)} - a_2\big) \\ &\quad - b_2\big(y_2(t-h) + x_2^*\big)\big]dt + \sigma_2y_2(t)dw_2(t). \end{aligned}$$

As a result, we obtain the system of two nonlinear Ito's stochastic delay differential equations [13] with the zero solution:

$$\begin{aligned} dy_1(t) &= \big[\big(y_1(t)+x_1^*\big)\big((a_1+b_1)e^{-p_1y_1(t)-q_1y_2(t)}-a_1\big)\\ &\quad -b_1\big(y_1(t-h)+x_1^*\big)\big]dt+\sigma_1y_1(t)dw_1(t),\\ dy_2(t) &= \big[\big(y_2(t)+x_2^*\big)\big((a_2+b_2)e^{-p_2y_1(t)-q_2y_2(t)}-a_2\big)\\ &\quad -b_2\big(y_2(t-h)+x_2^*\big)\big]dt+\sigma_2y_2(t)dw_2(t). \end{aligned} \tag{2.2}$$

Using the representation $e^{-x}=1-x+o(x)$, where $\lim_{x\to0}\frac{o(x)}{x}=0$, we obtain the linear part of the system (2.2). Really, neglecting the nonlinear terms in the square brackets of the first equation (2.2), we have

$$\begin{aligned} &\big(y_1(t)+x_1^*\big)\big((a_1+b_1)e^{-p_1y_1(t)-q_1y_2(t)}-a_1\big)-b_1\big(y_1(t-h)+x_1^*\big)\\ &\quad=\big(y_1(t)+x_1^*\big)\big((a_1+b_1)\big(1-p_1y_1(t)-q_1y_2(t)\big)-a_1\big)-b_1\big(y_1(t-h)+x_1^*\big)\\ &\quad=\big(y_1(t)+x_1^*\big)\big(b_1-(a_1+b_1)\big(p_1y_1(t)+q_1y_2(t)\big)\big)-b_1\big(y_1(t-h)+x_1^*\big)\\ &\quad=b_1\big(y_1(t)+x_1^*\big)-(a_1+b_1)x_1^*\big(p_1y_1(t)+q_1y_2(t)\big)-b_1\big(y_1(t-h)+x_1^*\big)\\ &\quad=\big(b_1-(a_1+b_1)x_1^*p_1\big)y_1(t)-(a_1+b_1)x_1^*q_1y_2(t)-b_1y_1(t-h). \end{aligned}$$

Similarly, for the second equation (2.2) we obtain

$$\begin{aligned} &\big(y_2(t)+x_2^*\big)\big((a_2+b_2)e^{-p_2y_1(t)-q_2y_2(t)}-a_2\big)-b_2\big(y_2(t-h)+x_2^*\big)\\ &\quad=\big(y_2(t)+x_2^*\big)\big((a_2+b_2)\big(1-p_2y_1(t)-q_2y_2(t)\big)-a_2\big)-b_2\big(y_2(t-h)+x_2^*\big)\\ &\quad=\big(y_2(t)+x_2^*\big)\big(b_2-(a_2+b_2)\big(p_2y_1(t)+q_2y_2(t)\big)\big)-b_2\big(y_2(t-h)+x_2^*\big)\\ &\quad=b_2\big(y_2(t)+x_2^*\big)-(a_2+b_2)x_2^*\big(p_2y_1(t)+q_2y_2(t)\big)-b_2\big(y_2(t-h)+x_2^*\big)\\ &\quad=-(a_2+b_2)x_2^*p_2y_1(t)+\big(b_2-(a_2+b_2)x_2^*q_2\big)y_2(t)-b_2y_2(t-h). \end{aligned}$$

As a result, we obtain the linear part of the system (2.2)

$$\begin{aligned} dz_1(t) &= \big[\big(b_1-(a_1+b_1)x_1^*p_1\big)z_1(t)-(a_1+b_1)x_1^*q_1z_2(t)-b_1z_1(t-h)\big]dt\\ &\quad+\sigma_1z_1(t)dw_1(t),\\ dz_2(t) &= \big[-(a_2+b_2)x_2^*p_2z_1(t)+\big(b_2-(a_2+b_2)x_2^*q_2\big)z_2(t)-b_2z_2(t-h)\big]dt\\ &\quad+\sigma_2z_2(t)dw_2(t), \end{aligned}$$

or in the matrix form

$$dz(t)=\big(Az(t)-Bz(t-h)\big)dt+\sum_{i=1}^{2}C_iz(t)dw_i(t), \tag{2.3}$$

where

$$\begin{aligned} &z(t)=\begin{bmatrix}z_1(t)\\ z_2(t)\end{bmatrix},\quad A=\begin{bmatrix}b_1-(a_1+b_1)x_1^*p_1 & -(a_1+b_1)x_1^*q_1\\ -(a_2+b_2)x_2^*p_2 & b_2-(a_2+b_2)x_2^*q_2\end{bmatrix},\\ &B=\begin{bmatrix}b_1 & 0\\ 0 & b_2\end{bmatrix},\quad C_1=\begin{bmatrix}\sigma_1 & 0\\ 0 & 0\end{bmatrix},\quad C_2=\begin{bmatrix}0 & 0\\ 0 & \sigma_2\end{bmatrix}. \end{aligned} \tag{2.4}$$

2.2 Zero equilibrium

Let us linearize the system (2.1) with the zero equilibrium. Neglecting the nonlinear terms, transform the expression in brackets of the first equation (2.1) by the following way:

$$\begin{aligned} &- a_1x_1(t) - b_1x_1(t-h) + c_1x_1(t)e^{-p_1x_1(t)-q_1x_2(t)} \\ &\quad = -a_1x_1(t) - b_1x_1(t-h) + c_1x_1(t)\big(1 - p_1x_1(t) - q_1x_2(t)\big) \\ &\quad = (c_1 - a_1)x_1(t) - b_1x_1(t-h). \end{aligned}$$

Similarly, for the second equation (2.1) we have

$$\begin{aligned} &- a_2x_2(t) - b_2x_2(t-h) + c_2x_2(t)e^{-p_2x_1(t)-q_2x_2(t)} \\ &\quad = -a_2x_2(t) - b_2x_2(t-h) + c_2x_2(t)\big(1 - p_2x_1(t) - q_2x_2(t)\big) \\ &\quad = (c_2 - a_2)x_2(t) - b_2x_2(t-h). \end{aligned}$$

As a result, we obtain that the linearized system decomposes into two unrelated equations of the same type

$$\begin{aligned} dz_1(t) &= \big[(c_1 - a_1)z_1(t) - b_1z_1(t-h)\big]dt + \sigma_1z_1(t)dw_1(t), \\ dz_2(t) &= \big[(c_2 - a_2)z_2(t) - b_2z_2(t-h)\big]dt + \sigma_2z_2(t)dw_2(t). \end{aligned} \tag{2.5}$$

3 Stability

3.1 Some necessary definitions and statements

Let $\{\Omega, \mathfrak{F}, \mathbf{P}\}$ be a complete probability space, $\{\mathfrak{F}_t\}_{t\geq 0}$ be a nondecreasing family of sub-σ-algebras of $\mathfrak{F}$, i.e. $\mathfrak{F}_s \subset \mathfrak{F}_t$ for $s < t$, $\mathbf{P}\{\cdot\}$ be the probability of an event enclosed in the braces, $\mathbf{E}$ be the mathematical expectation, H_2 be the space of $\mathfrak{F}_0$-adapted stochastic processes $\varphi(s) = (\varphi_1(s), \varphi_2(s))$, $s \in [-h, 0]$, $\|\varphi\|_0 = \sup_{s\in[-h,0]} |\varphi(s)|$, $\|\varphi\|_1^2 = \sup_{s\in[-h,0]} \mathbf{E}|\varphi(s)|^2$, $|\varphi(s)| = \sqrt{\varphi_1^2(s) + \varphi_2^2(s)}$, $|\varphi(s)|^2 = \varphi_1^2(s) + \varphi_2^2(s)$.

Definition 3.1. The zero solution of the system (2.2) with the initial condition $y(s) = (y_1(s), y_2(s)) = \phi(s)$, $s \in [-h, 0]$, is called stable in probability if for any $\varepsilon_1 > 0$ and $\varepsilon_2 > 0$ there exists $\delta > 0$ such that the solution $y(t, \phi)$ of the system (2.2) satisfies the condition $\mathbf{P}\{\sup_{t\geq 0} |y(t, \phi)| > \varepsilon_1\} < \varepsilon_2$ for any initial function ϕ such that $\mathbf{P}\{\|\phi\|_0 < \delta\} = 1$.

Definition 3.2. The zero solution of the equation (2.3) with the initial condition $z(s) = \phi(s)$, $s \in [-h, 0]$, is called:

- mean square stable if for each $\varepsilon > 0$ there exists a $\delta > 0$ such that $\mathbf{E}|z(t, \phi)|^2 < \varepsilon$, $t \geq 0$, provided that $\|\phi\|_1^2 < \delta$;
- asymptotically mean square stable if it is mean square stable and $\lim_{t\to\infty} \mathbf{E}|z(t, \phi)|^2 = 0$ for each initial function ϕ.

Remark 3.1. Note that the level of nonlinearity of the system (2.2) is more than one. It is known [32] that in this case sufficient conditions for asymptotic mean square stability of the zero solution of the linear part of this system, i.e. of the equation (2.3), are also sufficient conditions for stability in probability of the zero solution of the nonlinear system (2.2) and therefore are sufficient conditions for stability in probability of the equilibrium (x_1^*, x_2^*) of the system (2.1).

Let $z(t)$ be a value of the solution of the equation (2.3) in the time moment t and $z_t = z(t+s)$, $s \in [-h, 0]$, be a trajectory of the solution of the equation (2.3) until the time moment t.

Consider a functional $V(t, \varphi) : [0, \infty) \times H_2 \to \mathbf{R}_+$ that can be represented in the form $V(t, \varphi) = V(t, \varphi(0), \varphi(s))$, $s \in [-h, 0)$, and for $\varphi = z_t$ put

$$\begin{gathered} V_\varphi(t, z) = V(t, \varphi) = V(t, z_t) = V\big(t, z, z(t+s)\big), \\ z = \varphi(0) = z(t), \quad s \in [-h, 0). \end{gathered} \tag{3.1}$$

Let D be the set of the functionals, for which the function $V_\varphi(t, z)$ defined by (3.1) has a continuous derivative with respect to t and two continuous derivatives with respect to z. The generator L of the equation (2.3) is defined on the functionals from D and has the form [13, 32] (here and everywhere below $'$ is the sign of transposition)

$$\begin{aligned} LV(t, z_t) = {} & \frac{\partial}{\partial t} V_\varphi\big(t, z(t)\big) + \nabla V'_\varphi\big(t, z(t)\big)\big(Az(t) - Bx(t-h)\big) \\ & + \frac{1}{2}\sum_{i=1}^{2} z'(t) C_i' \nabla^2 V_\varphi\big(t, z(t)\big) C_i z(t). \end{aligned} \tag{3.2}$$

Theorem 3.1 ([32]). *Let there exist a functional $V(t, \varphi) \in D$, positive constants c_1, c_2, c_3, such that the following conditions hold:*

$$\mathbf{E}V(t, x_t) \geq c_1 \mathbf{E}|x(t)|^2, \quad \mathbf{E}V(0, \phi) \leq c_2 \|\phi\|^2, \quad \mathbf{E}LV(t, x_t) \leq -c_3 \mathbf{E}|x(t)|^2.$$

Then the zero solution of the equation (2.3) is asymptotically mean square stable.

3.2 Nonzero equilibrium

Theorem 3.2. *Let there exist positive definite matrices P and R, such that the linear matrix inequality (LMI)*

$$\Phi = \begin{bmatrix} PA + A'P + S_0 + R & -PB \\ -B'P & -R \end{bmatrix} < 0 \tag{3.3}$$

holds, where via (2.4)

$$S_0 = \sum_{i=1}^{2} C_i' P C_i = \begin{bmatrix} \sigma_1^2 p_{11} & 0 \\ 0 & \sigma_2^2 p_{22} \end{bmatrix}$$

and p_{11}, p_{22} are diagonal elements of the matrix P. Then the equilibrium (x_1^*, x_2^*) of the system (2.1) is stable in probability.

Proof. Following Remark 3.1, it is enough to prove the asymptotic mean square stability of the zero solution of the linear equation (2.3). Using the general method of Lyapunov functionals construction [16, 17, 31, 32], consider the functional $V = V_1 + V_2$, where $V_1(z(t)) = z'(t)Pz(t)$, $P > 0$, the additional functional V_2 will be chosen below. Via (2.3), (3.2) and $\nabla V_1(z(t) = 2Pz(t)$, $\nabla^2 V_1(z(t)) = 2P$, we have

$$\begin{aligned} LV_1\big(z(t)\big) &= 2z'(t)P\big(Az(t) - Bx(t-h)\big) + z'(t)S_0 z(t) \\ &= z'(t)\big(PA + A'P + S_0\big)z(t) - 2z'(t)PBz(t-h). \end{aligned}$$

Putting $V_2(z_t) = \int_{t-h}^{t} z'(s)Rz(s)ds$, $R > 0$, with $LV_2(z_t) = z'(t)Rz(t) - z'(t-h)Rz(t-h)$, as a result for the functional $V = V_1 + V_2$, we obtain

$$\begin{aligned} LV\big(z(t)\big) &= z'(t)\big(PA + A'P + S_0 + R\big)z(t) \\ &\quad - 2z'(t)PBz(t-h) - z'(t-h)Rz(t-h) \\ &= \eta'(t)\Phi\eta(t), \end{aligned}$$

where $\eta(t) = (z(t), z(t-h))'$ and the matrix Φ is defined in (3.3). From here and the LMI (3.3) it follows that $LV(z(t)) \le -c|\eta(t)|^2 \le -c|z(t)|^2$ for some $c > 0$. Via Theorem 3.1 it means that the zero solution of the linear equation (2.3) is asymptotically mean square stable.

Via Remark 3.1 the sufficient conditions for asymptotic mean square stability of the zero solution of the linear equation (2.3) are also sufficient conditions for stability in probability of the zero solution of the nonlinear system (2.2) and therefore are sufficient conditions for stability in probability of the equilibrium (x_1^*, x_2^*) of the system (2.1). The proof is completed. □

Example 3.1. Consider the system (2.1) with the following values of the parameters:

$$\begin{gathered} a_1 = 1, \quad b_1 = 0.02, \quad c_1 = 4, \quad p_1 = 2, \quad q_1 = 0.2, \quad \sigma_1 = 1, \quad h = 1, \\ a_2 = 2, \quad b_2 = 0.03, \quad c_2 = 5, \quad p_2 = 0.2, \quad q_2 = 2, \quad \sigma_2 = 1. \end{gathered} \tag{3.4}$$

By that from (1.4) and (2.4) we obtain

$$\begin{gathered} x_1^* = 0.6446, \quad x_2^* = 0.3862, \\ A = \begin{bmatrix} -1.2950 & -0.1315 \\ -0.1568 & -1.5381 \end{bmatrix}, \quad B = \begin{bmatrix} 0.02 & 0 \\ 0 & 0.03 \end{bmatrix}, \quad C_1 = \begin{bmatrix} 1 & 0 \\ 0 & 0 \end{bmatrix}, \quad C_2 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix}. \end{gathered} \tag{3.5}$$

Via MATLAB it was shown that for the parameters (3.4), (3.5) there exist the positive definite matrices

$$P = \begin{bmatrix} 301.6380 & -23.3803 \\ -23.3803 & 252.7107 \end{bmatrix}, \quad R = \begin{bmatrix} 268.6902 & 4.3515 \\ 4.3515 & 281.0097 \end{bmatrix},$$

for which the LMI (3.3) holds. It means that the equilibrium $(x_1^*, x_2^*) = (0.6446, 0.3862)$ of the system (2.1) is stable in probability. In Fig. 1 100 trajectories of the solution of the system (2.1) are shown, with the initial conditions $x_1(s) = 0.77$, $x_2(s) = 0.27$, $s \in [-h, 0]$. One can see that all trajectories converge to the equilibrium.

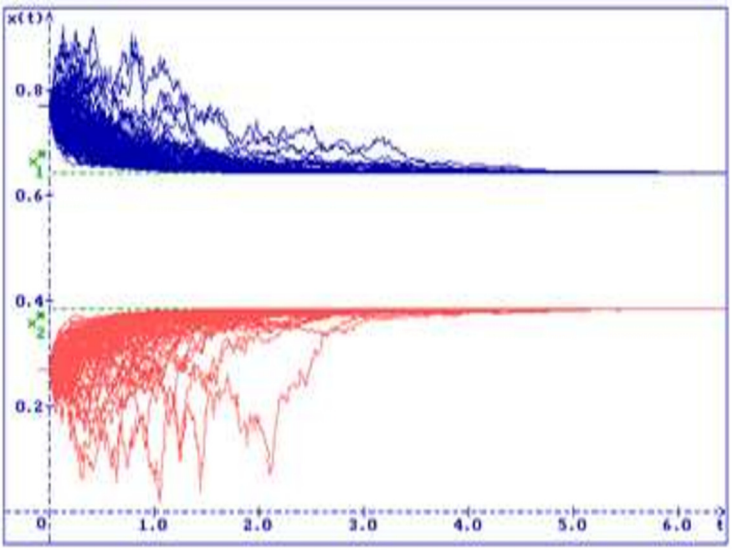


Fig. 1. 100 trajectories of the solution of the system (2.1): $x_1(t)$ (blue) and $x_2(t)$ (red)

3.3 Zero equilibrium

Note that both equations of the system (2.5) have the form

$$\dot{x}(t) = ax(t) + bx(t-h) + \sigma x(t)\dot{w}(t), \tag{3.6}$$

where $a = c_i - a_i$, $b = -b_i$, σ, $h \geq 0$ are known constants.

Lemma 3.1 ([32])**.** *The necessary and sufficient condition for asymptotic mean square stability of the zero solution of the equation* (3.6) *is*

$$a + b < 0, \quad G^{-1} > \frac{1}{2}\sigma^2, \tag{3.7}$$

where

$$G = \begin{cases} \frac{bq^{-1}\sin(qh)-1}{a+b\cos(qh)}, & b + |a| < 0, \quad q = \sqrt{b^2 - a^2}, \\ \frac{1+|a|h}{2|a|}, & b = a < 0, \\ \frac{bq^{-1}\sinh(qh)-1}{a+b\cosh(qh)}, & a + |b| < 0, \quad q = \sqrt{a^2 - b^2}. \end{cases} \tag{3.8}$$

If, in particular, $b = 0$*, then this necessary and sufficient stability condition takes the form* $2a + \sigma^2 < 0$.

Via Remark 3.1 and Lemma 3.1, we obtain

Theorem 3.3. *Let the conditions*

$$c_i < a_i + b_i, \quad G_i^{-1} > \frac{1}{2}\sigma_i^2, \quad i = 1, 2, \tag{3.9}$$

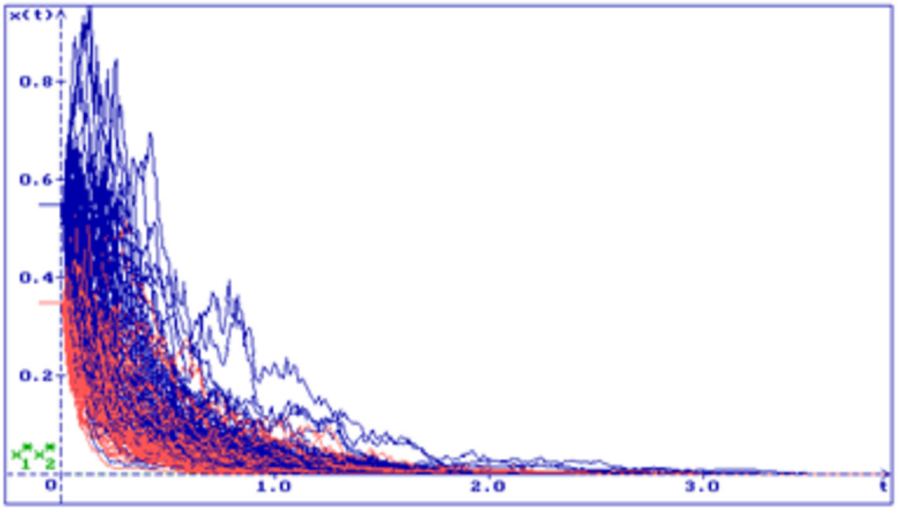


Fig. 2. 100 trajectories of the solution of the system (2.1): $x_1(t)$ (blue) and $x_2(t)$ (red)

hold, where

$$G_i = \begin{cases} \frac{1+b_i q_i^{-1}\sin(q_i h)}{a_i - c_i + b_i\cos(q_i h)}, & |a_i - c_i| < b_i, \quad q_i = \sqrt{b_i^2 - (a_i - c_i)^2}, \\ \frac{1+(a_i - c_i)h}{2(a_i - c_i)}, & b_i = a_i - c_i > 0, \\ \frac{1+b_i q_i^{-1}\sinh(q_i h)}{a_i - c_i + b_i\cosh(q_i h)}, & b_i < a_i - c_i, \quad q_i = \sqrt{(a_i - c_i)^2 - b_i^2}. \end{cases} \tag{3.10}$$

Then the zero equilibrium $(x_1^*, x_2^*) = (0, 0)$ *of the system* (2.1) *is stable in probability.*

Proof. Via the equation (3.6), for the proof it is enough to use Lemma 3.1, putting into (3.7) and (3.8)

$$a = c_i - a_i, \quad b = -b_i, \quad G = G_i, \quad \sigma = \sigma_i.$$

By that, (3.7) and (3.8) are transformed into (3.9) and (3.10). The proof is completed. □

Example 3.2. Consider the system (2.1) with the following values of the parameters:

$$\begin{gathered} a_1 = 2, \quad b_1 = 1, \quad c_1 = 1, \quad p_1 = 2, \quad q_1 = 0.2, \quad \sigma_1 = 0.9, \quad h = 1, \\ a_2 = 3, \quad b_2 = 1, \quad c_2 = 2, \quad p_2 = 0.2, \quad q_2 = 2, \quad \sigma_2 = 0.9. \end{gathered} \tag{3.11}$$

It is easy to see, that for the values of the parameters (3.11) the conditions (3.9) hold. Therefore, the zero equilibrium of the system (2.1) is stable in probability. In Fig. 2 100 trajectories of the solution of the system (2.1) are shown, with the initial conditions $x_1(s) = 0.55$, $x_2(s) = 0.35$, $s \in [-h, 0]$. One can see that all trajectories converge to the zero.

4 Conclusions

A system of two differential equations with exponential nonlinearity is considered. The nonlinearity in each equation depends on both variables of the system. It is supposed that this system is exposed to stochastic perturbations of the white noise type, which are directly proportional to the deviation of the system state from one of the system's equilibria (the zero or nonzero). Some sufficient conditions for stability in probability of the both system equilibria are obtained by virtue of the general method of Lyapunov functionals construction and the method of linear matrix inequalities (LMIs). The obtained results are illustrated by numerical simulations of solutions of the considered system. The method of stability investigation described here can be applied to systems of higher dimension and with other types of nonlinearity.

References

[1] Beretta, E., Kolmanovskii, V., Shaikhet, L.: Stability of epidemic model with time delays influenced by stochastic perturbations. Math. Comput. Simul. **45**(3-4), 269–277 (1998). Special Issue "Delay Systems". MR1622405. https://doi.org/10.1016/S0378-4754(97)00106-7

[2] Berezansky, L., Braverman, E., Idels, L.: Nicholson's blowflies differential equations revisited: Main results and open problems. Appl. Math. Model. **34**(6), 1405–1417 (2010). MR2592579. https://doi.org/10.1016/j.apm.2009.08.027

[3] Boyd, S., El-Ghaoui, L., Feron, E., Balakrishnan, V.: Linear Matrix Inequalities in System and Control Theory. SIAM, Philadelphia, PA, USA (1994). MR1284712. https://doi.org/10.1137/1.9781611970777

[4] Bradul, N., Shaikhet, L.: Stability of the positive point of equilibrium of Nicholson's blowflies equation with stochastic perturbations: numerical analysis. Discrete Dyn. Nat. Soc. **25**, 92959 (2007). MR2346516. https://doi.org/10.1155/2007/92959

[5] Chen, W., Wang, W.: Global exponential stability for a delay differential neoclassical growth model. Adv. Differ. Equ. **2014**(9), 325 (2014). MR3360574. https://doi.org/10.1186/1687-1847-2014-325

[6] Choi, H.H.: A new method for variable structure control system design: A linear matrix inequality approach. Automatica **33**, 2089–2092 (1997). MR1486914. https://doi.org/10.1016/S0005-1098(97)00118-0

[7] Ding, X., Li, W.: Stability and bifurcation of numerical discretization Nicholson blowflies equation with delay. Discrete Dyn. Nat. Soc. **2006**, 19413 (2006), 12 pp. MR2244293. https://doi.org/10.1155/DDNS/2006/19413

[8] El-Metwally, E., Grove, E.A., Ladas, G., Levins, R., Radin, M.: On the difference equation $x_{n+1} = \alpha + \beta x_{n-1} e^{-x_n}$. Nonlinear Anal. **47**(7), 4623–4634 (2001). MR1975856. https://doi.org/10.1016/S0362-546X(01)00575-2

[9] Feckan, M., Marynets, K.: Study of differential equations with exponential nonlinearities via the lower and upper solutions' method. Numer. Anal. Appl. Math. **1**(2), 1–7 (2020). https://doi.org/10.36686/Ariviyal.NAAM.2020.01.02.007

[10] Fridman, E., Shaikhet, L.: Stabilization by using artificial delays: an LMI approach. Automatica **81**, 429–437 (2017). MR3654628. https://doi.org/10.1016/j.automatica.2017.04.015

[11] Fridman, E., Shaikhet, L.: Delay-dependent LMI conditions for stability of stochastic systems with delay term in the form of Stieltjes integral. In: Proceedings of 57th IEEE Conference on Decision and Control, Fontainebleau, Miami Beach, Florida, USA, pp. 6567–6572 (2018)

[12] Fridman, E., Shaikhet, L.: Simple LMIs for stability of stochastic systems with delay term given by Stieltjes integral or with stabilizing delay. Syst. Control Lett. **124**, 83–91 (2019). MR3899077. https://doi.org/10.1016/j.sysconle.2018.12.007

[13] Gikhman, I.I., Skorokhod, A.V.: Stochastic Differential Equations. Springer, Berlin, Germany (1972). MR0346904

[14] Gouaisbaut, F., Dambrine, M., Richard, J.P.: Robust control of delay systems: a sliding mode control design via LMI. Syst. Control Lett. **46**(4), 219–230 (2002). MR2010239. https://doi.org/10.1016/S0167-6911(01)00199-2

[15] Kara, M.: Investigation of the global dynamics of two exponential-form difference equations systems. Electron. Res. Arch. **31**(11), 6697–6724 (2023). MR4657209. https://doi.org/10.3934/era.2023338

[16] Kolmanovskii, V., Shaikhet, L.: Some peculiarities of the general method of Lyapunov functionals construction. Appl. Math. Lett. **15**(3), 355–360 (2002). MR1891559. https://doi.org/10.1016/S0893-9659(01)00143-4

[17] Kolmanovskii, V., Shaikhet, L.: About one application of the general method of Lyapunov functionals construction. Int. J. Robust Nonlinear Control **13**(9), 805–818 (2003). MR1998313. https://doi.org/10.1002/rnc.846

[18] Li, J., Zhang, B., Li, Y.: Dependence of stability of Nicholson's blowflies equation with maturation stage on parameters. J. Appl. Anal. Comput. **7**(12), 670–680 (2017). MR3602445. https://doi.org/10.11948/2017042

[19] Li, W.T., Fan, Y.H.: Existence and global attractivity of positive periodic solutions for the impulsive delay Nicholson's blowflies model. J. Comput. Appl. Math. **201**(1), 55–68 (2007). MR2293538. https://doi.org/10.1016/j.cam.2006.02.001

[20] Matsumoto, A., Szidarovszky, F.: Delay differential neoclassical growth model. J. Econ. Behav. Organ. **78**, 272–289 (2011)

[21] Matsumoto, A., Szidarovszky, F.: Asymptotic behavior of a delay differential neoclassical growth model. Sustainability **5**, 440–455 (2013)

[22] Nakamura, M., Ozawa, T.: Global solutions in the critical Sobolev space for the wave equations with nonlinearity of exponential growth. Math. Z. **231**, 479–487 (1999). MR1704989. https://doi.org/10.1007/PL00004737

[23] Nguang, S.K.: Robust H^{∞} control of a class of nonlinear systems with delayed state and control: an LMI approach. In: Proceedings of 37th IEEE Conference on Decision and Control, Tampa, Florida, USA, pp. 2384–2389 (1998)

[24] Nicholson, A.J.: An outline of the dynamics of animal populations. Aust. J. Zool. **2**(1), 9–65 (1954)

[25] Niculescu, S.I.: H^{∞} memory less control with an α-stability constraint for time delays systems: an LMI approach. IEEE Trans. Autom. Control **43**(5), 739–743 (1998). MR1618043. https://doi.org/10.1109/9.668850

[26] Papaschinopoulos, G., Ellina, G., Papadopoulos, K.B.: Asymptotic behavior of the positive solutions of an exponential type system of difference equations. Appl. Math. Comput. **245**, 181–190 (2014). MR3260707. https://doi.org/10.1016/j.amc.2014.07.074

[27] Papaschinopoulos, G., Fotiades, N., Schinas, C.J.: On a system of difference equations including negative exponential terms. J. Differ. Equ. Appl. **20**(5-6), 717–732 (2014). MR3210311. https://doi.org/10.1080/10236198.2013.814647

[28] Papaschinopoulos, G., Radin, M.A., Schinas, C.J.: On the system of two difference equations of exponential form: $x_{n+1} = a + bx_{n-1}e^{-y_n}$, $y_{n+1} = c + dy_{n-1}e^{-x_n}$. Math. Comput. Model. **54**(11), 2969–2977 (2011). MR2841840. https://doi.org/10.1016/j.mcm.2011.07.019

[29] Papaschinopoulos, G., Radin, M.A., Schinas, C.J.: Study of the asymptotic behavior of the solutions of three systems of difference equations of exponential form. Appl. Math. Comput. **218**(9), 5310–5318 (2012). MR2870051. https://doi.org/10.1016/j.amc.2011.11.014

[30] Seuret, A., Gouaisbaut, F.: Hierarchy of LMI conditions for the stability analysis of time-delay systems. Syst. Control Lett. **81**, 1–7 (2015). MR3353689. https://doi.org/10.1016/j.sysconle.2015.03.007

[31] Shaikhet, L.: Lyapunov Functionals and Stability of Stochastic Difference Equations. Springer Science & Business Media, London, UK (2011). MR3076210. https://doi.org/10.1007/978-3-319-00101-2

[32] Shaikhet, L.: Lyapunov Functionals and Stability of Stochastic Functional Differential Equations. Springer, Berlin, Germany (2013). MR3076210. https://doi.org/10.1007/978-3-319-00101-2

[33] Shaikhet, L.: Stability of equilibrium states for a stochastically perturbed Mosquito population equation. Dyn. Contin. Discrete Impuls. Syst., Ser. B, Appl. Algorithms **21**(2-3), 185–196 (2014). MR3298848

[34] Shaikhet, L.: Stability of equilibrium states for a stochastically perturbed exponential type system of difference equations. J. Comput. Appl. Math. **290**, 92–103 (2015). MR3370394. https://doi.org/10.1016/j.cam.2015.05.002

[35] Shaikhet, L.: Stability of equilibriums of stochastically perturbed delay differential neoclassical growth model. Discrete Contin. Dyn. Syst., Ser. B **22**(4), 1565–1573 (2017). MR3639178. https://doi.org/10.3934/dcdsb.2017075

[36] Shaikhet, L.: Stability of the zero and positive equilibria of two connected neoclassical growth models under stochastic perturbations. Commun. Nonlinear Sci. Numer. Simul. **65**, 86–93 (2019). Pub. online: August 2018. MR3860057. https://doi.org/10.1016/j.cnsns.2018.07.033

[37] Shaikhet, L.: About stability of nonlinear stochastic differential equations with state-dependent delay. Symmetry **14**(11), 2307 (2022). https://www.mdpi.com/2073-8994/14/11/2307/pdf

[38] Shaikhet, L.: Stability of equilibria of exponential type system of three differential equations under stochastic perturbations. Math. Comput. Simul. **206**, 105–117 (2023). MR4517038. https://doi.org/10.1016/j.matcom.2022.11.008

[39] Shaikhet, L.: Stability of the exponential type system of stochastic difference equations. Mathematics **11**(18), 3975 (2023). Special Issue "Nonlinear Stochastic Dynamics and Control and Its Applications". https://www.mdpi.com/2227-7390/11/18/3975

[40] Thai, T.H., Dai, N.A., Anh, P.T.: Global dynamics of some system of second-order difference equations. Electron. Res. Arch. **29**(6), 4159–4175 (2021). MR4342296. https://doi.org/10.3934/era.2021077

[41] Wan, H., Zhu, H.: A new model with delay for mosquito population dynamics. Math. Biosci. Eng. **11**(6), 1395–1410 (2014). MR3263418. https://doi.org/10.3934/mbe.2014.11.1395